

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<=95\%$  [at  $60 \text{ deg C} / 140 \text{ F}$ ]  
 Shielding /屏蔽性能:  $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$   
 Salt Spray Corrosion/盐雾:  $96\text{hr}$

Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$   
 Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$   
 Endurance (Shell)/机械寿命:  $5000+$   
 Cable/配接电缆:  $\phi 8.1\text{mm} - \phi 9.0\text{mm}$

2. 电气性能



Insert Configuration/针芯配置:  $3\text{BP. } 309 \text{ 9Low Voltage}$   
 Pin Size/接触件直径:  $\phi 2.0/1.3\text{mm}$   
 Contact resistance接触电阻:  $\leq 3.5\text{m}\Omega, 5\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压 $500\text{V}(\text{DC})$ )  
 Withstand voltage/耐电压:  $1350\text{V}(\text{AC})$   
 Rated working current额定工作电流:  $15.0/6.0\text{A}$

Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE ROHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图

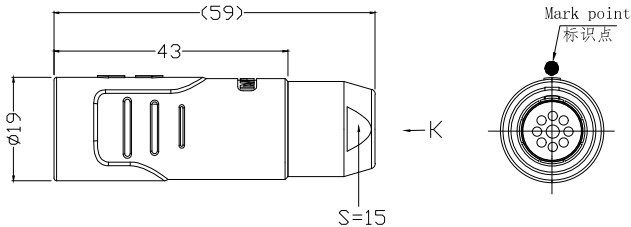

Socket front view  
插座前视图



view K  
K向孔位排列

DRAWN BY: 绘图: P003      2024.05.28 CHECKED BY: 审核: Z01      2024.05.28 APPROVED BY: 核准: P005      2024.05.28		美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	名称 PART NAME DHA-3BP浮动式插座 (不带护套式尾帽) DHA-3BP Floating socket (without jacketed tail cap)	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \quad \pm 0.1$ $< 10^{\circ} \leq 20 \quad \pm 0.15$ $< 20^{\circ} \leq 50 \quad \pm 0.3$ Angle $\pm 1^{\circ}$			单位 UNIT: mm 比例 SCALE: 1: 1 名称 SIZE: A4	型号 PART NAME DHA. 3BP. 309. KWKL D92
REV/版本      A1		SHEET: 1 Of 1	名称 PART NAME	