

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $\leq 95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 4.1\text{mm} - \phi 5.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 3BP. 309 9Low Voltage

Pin Size/接触件直径: $\phi 2.0/1.3\text{mm}$

Contact resistance接触电阻: $\leq 3.5\text{m}\Omega, \leq 5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1350V(AC)

Rated working current额定工作电流: 15.0/6.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK



Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/备注内容	DATE/日期	DRAWN BY/绘图

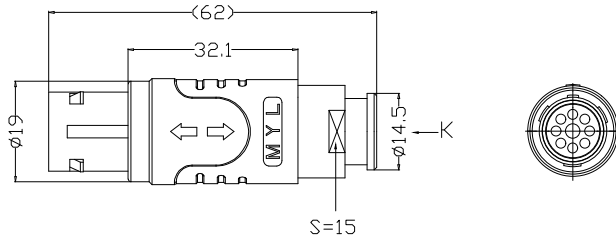

Plug front view
插头前视图



view K
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司

Meiyilian electronic technology(shenzhen)Co., Ltd.



FIRST ANGLE PROJECTION

单位
UNIT: mm

比例
SCALE: 1: 1

名称
PART NAME

型号
PART NAME

REV/版本

A1

SHEET: 1 OF 1

TG-3BP直式插头(带护套式尾帽)
TG-3BP Straight Plug
(with jacketed tail cap)

TGA. 3BP. 309. KWKAD5Z2

GENERAL TOLERANCE (UNLESS SPECIFIED)	≤ 10 ± 0.1	$< 10^{\circ} \sim \leq 20$ ± 0.15	$> 20^{\circ} \sim \leq 50$ ± 0.3	角度 $\pm 1^{\circ}$
---	---------------------	--	---------------------------------------	--------------------