

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]
 Shock Resistance/冲击 : 100g[6ms]
 Endurance (Shell)/机械寿命 : 5000+
 Cable/配接电缆: $\phi 5.1\text{mm}-\phi 6.0\text{mm}$

2. 电气性能



Insert Configuration/针芯配置:3BP.326 26Low Voltage
 Pin Size/接触件直径: $\phi 0.7\text{mm}$
 Contact resistance接触电阻: $\leq 4.5\text{m}\Omega$
 Insulation resistance/绝缘电阻:5000M Ω (测试电压500V(DC))
 Withstand voltage/耐压:950V(AC)
 Rated working current额定工作电流:4.0A

Other Specification/其它规格:


Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质 : PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/绘图

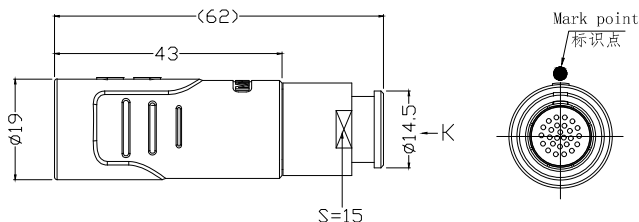

Socket front view
插座前视图



view K
K向孔位排列

DRAWN BY: 绘图: P003	2024. 05. 28	 美易连电子科技（深圳）有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	名称		DHA-3BP浮动式插座（带护套式尾帽） DHA-3BP Floating socket (with Jacketed tail cap)
CHECKED BY: 审核: Z01	2024. 05. 28		比例		
APPROVED BY: 核准: P005	2024. 05. 28		SCALE: 1: 1		
GENERAL TOLERANCE (UNLESS SPECIFIED)		 FIRST ANGLE PROJECTION	单位	名称	DHA-3BP浮动式插座（带护套式尾帽） DHA-3BP Floating socket (with Jacketed tail cap)
≤10 ±0.1 <10° ≤20 ±0.15 <20° ≤30 ±0.3 AngLe ±1°			UNT: mm	PART NAME	
			SIZE: A1	型号	DHA. 3BP. 326. KWKL62Z
			REV/版本	A1	SHEET: 1 OF 1

1

2

<https://www.mylconnector.com/>

4

5

<https://www.mylconnector.com/>

7

8