

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$
 Humidity(max)/最大潮湿: $<95\%$ [at $60\text{ deg C} / 140\text{ F}$]
 Shielding /屏蔽性能: $75\text{dB}(10\text{MHz})$ $40\text{dB}(1\text{GHz})$
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: $15\text{g}[10\text{Hz}\sim 2000\text{Hz}]$
 Shock Resistance/冲击: $100\text{g}[6\text{ms}]$
 Endurance (Shell)/机械寿命: $5000+$
 Cable/配接电缆: $\phi 4.1\text{mm}-\phi 5.0\text{mm}$

2. 电气性能



Insert Configuration/针芯配置: $3\text{BP}.316\ 16\text{Low Voltage}$
 Pin Size/接触件直径: $\phi 0.9\text{mm}$
 Contact resistance/接触电阻: $\leq 6\text{m}\Omega$
 Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压 $500\text{V}(\text{DC})$)
 Withstand voltage/耐电压: $1200\text{V}(\text{AC})$
 Rated working current/额定工作电流: 8.0A

Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PPS
 IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

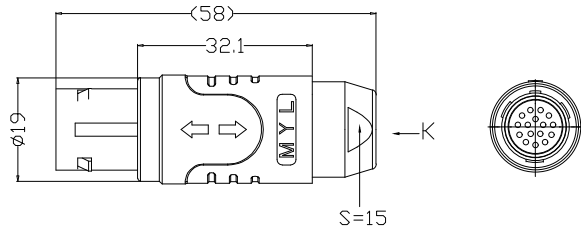

Plug front view
插头前视图




view K
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	FIRST ANGLE PROJECTION
≤ 10 ± 0.1	
$< 10 \sim \leq 20$ ± 0.15	
$< 20 \sim \leq 50$ ± 0.3	
Angle $\pm 1^{\circ}$	



FIRST ANGLE PROJECTION

REV/版本	A1
--------	----

UNIT: mm	名称	TG-3BP直式插头(不带护套式尾帽)
SCALE: 1: 1	PART NAME	TG-3BP Straight Plug (without jacketed tail cap)
SIZE: A4	型号	TGA.3BP.316.KWLAD52
REV/版本	PART NAME	