

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

A Humidity(max)/最大潮湿:  $\leq 95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

B 2. 电气性能

Insert Configuration/针芯配置: 4BP. 330 30Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压:  $950\text{V(AC)}$

Rated working current额定工作电流:  $5.0\text{A}$

C Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK



Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS


IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

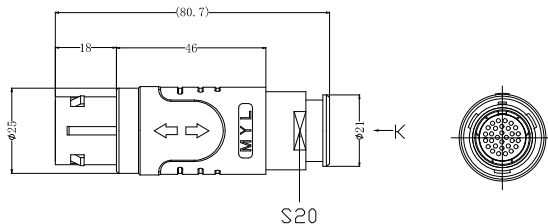

Plug front view  
插头前视图



view K  
K向孔位排列

DRAWN BY: 绘图: P003 2024.05.28			美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	
CHECKED BY: 审核: Z01 2024.05.28			TGG-4BP直式插头(带护套式尾帽) TGG-4BP Straight Plug (with jacketed tail cap)	
APPROVED BY: 核准: P005 2024.05.28		单位 UNIT: mm	名称	型号 TGG. 4BP. 330. KWLAD82Z
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^{\circ} \sim 20^{\circ} \pm 0.15$ $< 20^{\circ} \sim 50^{\circ} \pm 0.3$ Angle $\pm 1^{\circ}$		比例 SCALE: 1: 1	PART NAME	
FIRST ANGLE PROJECTION		尺寸 SIZE: A4	PART NAME	
REV/版本 A1		SHEET: 1 OF 1		