

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $<95\%$ [at $60 \text{ deg C} / 140 \text{ F}$]

Shielding /屏蔽性能: $75\text{dB}(10\text{MHz}) \quad 40\text{dB}(1\text{GHz})$

Salt Spray Corrosion/盐雾: 96hr



Mechanical data/机械特性:

Vibration/振动: $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击: $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: $5000+$

Cable/配接电缆: $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

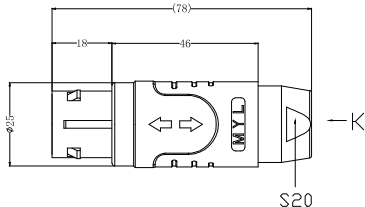

2. 电气性能

Insert Configuration/针芯配置: $4\text{BP. } 324 \quad 24\text{Low Voltage}$

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压 $500\text{V}(\text{DC})$)

Withstand voltage/耐电压: $1200\text{V}(\text{AC})$

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



view K
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY:
绘图: P003
2024.05.28

CHECKED BY:
审核: Z01
2024.05.28

APPROVED BY:
核准: P005
2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.


GENERAL TOLERANCE
(UNLESS SPECIFIED)

$\leq 10 \quad \pm 0.1$

$< 10 \sim \leq 20 \quad \pm 0.15$

$< 20 \sim \leq 50 \quad \pm 0.3$

Angle $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位
UNIT: mm

名称

比例
SCALE: 1:1

名称

型号

型号

REV/版本

AI

SHEET: 1 OF 1

TG-4BP直式插头(不带护套式尾帽)
TG-4BP Straight Plug
(without jacketed tail cap)

名称

型号

TGG. 4BP. 324. KWKADS2