

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]
 Shock Resistance/冲击: 100g[6ms]
 Endurance (Shell)/机械寿命: 5000+
 Cable/配接电缆: ϕ 10.9mm- ϕ 11.8mm

2. 电气性能



Insert Configuration/针芯配置: 3BP. 303 3Low Voltage
 Pin Size/接触件直径: ϕ 2.0mm
 Contact resistance接触电阻: \leq 3.5m Ω
 Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))
 Withstand voltage/耐电压: 1900V(AC)
 Rated working current额定工作电流: 25.0A

Other Specification/其它规格:



Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

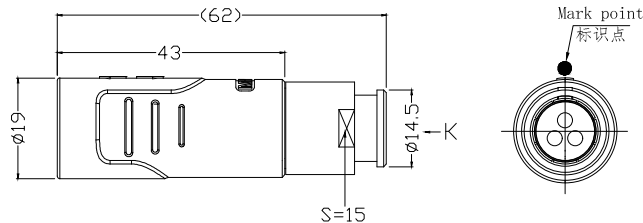

view K
K向孔位排列

DRAWN BY: 绘图: P003 2024.05.28 CHECKED BY: 审核: Z01 2024.05.28 APPROVED BY: 核准: P005 2024.05.28	 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.
GENERAL TOLERANCE (UNLESS SPECIFIED) ≤ 10 ± 0.1 $10 < \leq 20$ ± 0.15 $20 < \leq 50$ ± 0.3 Angle $\pm 1^\circ$	 单位 UNIT: mm 名称 PART NAME DWG-3BP浮动式插座(带护套式尾帽) DWG-3BP floating socket (with jacketed tail cap) 比例 SCALE: 1: 1 型号 PART NAME DHG. 3BP. 303. KWKLD120Z
FIRST ANGLE PROJECTION REV/版本 A1 SHEET: 1 OF 1	SIZE: A4