

# 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


## Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi$ 10.1mm- $\phi$ 11.0mm

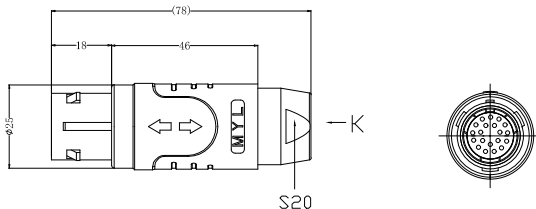

## 2. 电气性能

Insert Configuration/针芯配置: 4BP. 320 20Low Voltage

Pin Size/接触件直径:  $\phi$ 0.9mm

Contact resistance接触电阻:  $\leq$ 9m $\Omega$

Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 1350V(AC)

Rated working current额定工作电流: 8.0A

## Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图



view K  
K向孔位排列


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘制

DRAWN BY:  
绘图: P003 2024.05.28  
CHECKED BY:  
审核: Z01 2024.05.28  
APPROVED BY:  
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司  
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 $\leq$ 10  $\pm$ 0.1  
 $<10^{\circ}$   $\leq$ 20  $\pm$ 0.15  
 $<20^{\circ}$   $\leq$ 50  $\pm$ 0.3  
Angle  $\pm$ 1°



FIRST ANGLE PROJECTION

单位 UNIT: mm	名称 PART NAME	TG-4BP直式插头(不带护套式尾帽) TG-4BP Straight Plug (without jacketed tail cap)
比例 SCALE: 1:1	型号 PART NAME	TGG_4BP_320_KWLAD112
SIZE: A1	SHEET: 1 OF 1	

REV/版本 A1

