



# 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr


## Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 4.1\text{mm}-\phi 5.0\text{mm}$

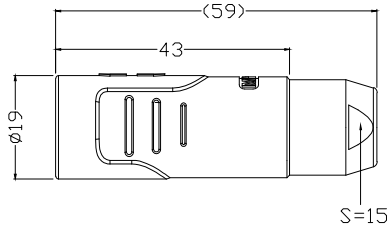


# 2. 电气性能

Insert Configuration/针芯配置:3BP,304 4Low Voltage  
 Pin Size/接触件直径: $\phi 2.0\text{mm}$   
 Contact resistance接触电阻: $\leq 3.5\text{m}\Omega$   
 Insulation resistance/绝缘电阻:5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压:1450V(AC)  
 Rated working current额定工作电流:19.0A



Socket front view  
插座前视图



view K  
K向孔位排列

## Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质 : 铜镀镍  
 Insulator material/绝缘体材料 : PEEK  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图:PD03	2024.05.28
CHECKED BY: 审核:Z01	2024.05.28
APPROVED BY: 核准:PD05	2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	$\leq 10$ $\pm 0.1$ $< 10^\circ \leq 20$ $\pm 0.15$ $< 20^\circ \leq 50$ $\pm 0.3$ Angle $\pm 1^\circ$
---	---



REV/版本	A1
--------	----

单位 UNIT: mm
比例 SCALE: 1:1
SIZE: A4
SHEET: 1 OF 1

名称 PART NAME	DHA-3BP浮动式插座(不带护套式尾帽) DHA-3BP Floating socket (without jacketed tail cap)
型号 PART NAME	DHA, 3BP, 304, KWKL052