

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 6.1\text{mm}-\phi 7.0\text{mm}$

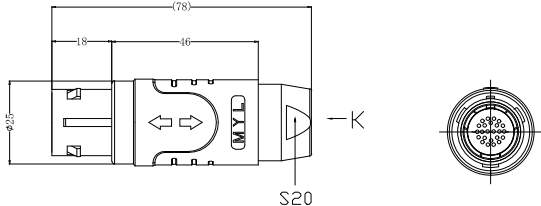

2. 电气性能

Insert Configuration/针芯配置: 4BP. 324 24Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1200V(AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PEEK

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view
插头前视图



view K
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘制

DRAWN BY:
绘图: P003

2024.05.28

CHECKED BY:
审核: 201

2024.05.28

APPROVED BY:
核准: P005

2024.05.28

GENERAL TOLERANCE
(UNLESS SPECIFIED)

≤ 10 ± 0.1

$< 10^\circ \leq 20$ ± 0.15


$< 20^\circ \leq 50$ ± 0.3

AngIe $\pm 1^\circ$



美易连电子科技(深圳)有限公司

Meiyilian electronic technology (shenzhen) Co., Ltd.



FIRST ANGLE PROJECTION

单位
UNIT: mm

比例
SCALE: 1:1

名称
PART NAME

型号
PART NAME

REV/版本

A1

SHEET: 1 OF 1

名称
PART NAME
TG-4BP 直式插头 (不带护套尾帽)
TG-4BP Straight Plug
(without jacketed tail cap)

型号
PART NAME
TGG. 4BP. 324. KWKAD72