

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$
 Humidity(max)/最大潮湿: $\leq 95\%$ [at $60\text{ deg C} / 140\text{ F}$]
 Shielding /屏蔽性能: $75\text{dB}(10\text{MHz})\ 40\text{dB}(1\text{GHz})$
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: $15\text{g}[10\text{Hz}\sim 2000\text{Hz}]$
 Shock Resistance/冲击: $100\text{g}[6\text{ms}]$
 Endurance (Shell)/机械寿命: 5000+
 Cable/配接电缆: $\phi 7.1\text{mm}\sim\phi 8.0\text{mm}$

2. 电气性能



Insert Configuration/针芯配置: 3BP. 304 4Low Voltage
 Pin Size/接触件直径: $\phi 2.0\text{mm}$
 Contact resistance接触电阻: $\leq 3.5\text{m}\Omega$
 Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压 $500\text{V}(\text{DC})$)
 Withstand voltage/耐电压: $1450\text{V}(\text{AC})$
 Rated working current额定工作电流: 19.0A

Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质: PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/谁画

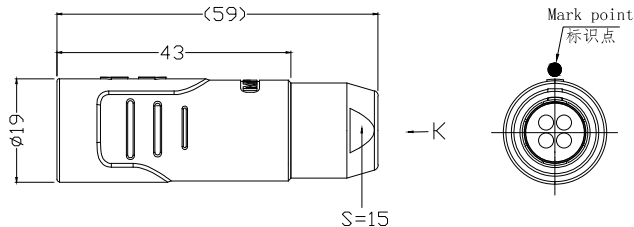

Socket front view
插座前视图



view K
K向孔位排列

DRAWN BY: 绘图: F003 2024.05.28		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	名称 PART NAME		DHA-3BP浮动式插座(不带护套式尾帽) DHA-3BP Floating socket (without jacketed tail cap)
CHECKED BY: 审核: Z01 2024.05.28			单位 UNITS: mm		型号 PART NAME
APPROVED BY: 核准: F005 2024.05.28			比例 SCALE: 1:1		
GENERAL TOLERANCE (UNLESS SPECIFIED)		FIRST ANGLE PROJECTION		SIZE: A4	号 PART NAME
$\leq 10\ \pm 0.1$ $< 10^{\circ} \sim \leq 20\ \pm 0.15$ $< 20^{\circ} \sim \leq 50\ \pm 0.3$ Angle $\pm 1^{\circ}$		REV/版本	A1	SHEET: 1 OF 1	