

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃  
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]  
 Shock Resistance/冲击: 100g[6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi 10.1\text{mm}-\phi 11.0\text{mm}$

2. 电气性能



Insert Configuration/针芯配置: 3BP. 318 18Low Voltage  
 Pin Size/接触件直径:  $\phi 0.9\text{mm}$   
 Contact resistance接触电阻:  $\leq 6\text{m}\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐压: 1200V(AC)  
 Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

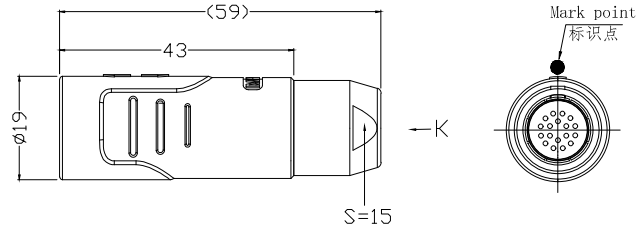

DRAWN BY: 绘图: PD03		2024. 05. 28																													
CHECKED BY: 审核: Z01		2024. 05. 28																													
APPROVED BY: 核准: PD03		2024. 05. 28																													
<table border="1"> <tr> <td colspan="2">GENERAL TOLERANCE (UNLESS SPECIFIED)</td> <td colspan="2">UNIT: mm</td> </tr> <tr> <td colspan="2"><math>\leq 10 \pm 0.1</math></td> <td colspan="2">名称</td> </tr> <tr> <td colspan="2"><math>&lt; 10 \sim \leq 20 \pm 0.15</math></td> <td colspan="2">PART NAME</td> </tr> <tr> <td colspan="2"><math>&lt; 20 \sim \leq 50 \pm 0.3</math></td> <td colspan="2">SCALE: 1: 1</td> </tr> <tr> <td colspan="2">Angle <math>\pm 1^\circ</math></td> <td colspan="2">SIZE: A4</td> </tr> <tr> <td colspan="2"> </td> <td colspan="2">型号</td> </tr> <tr> <td colspan="2"> </td> <td colspan="2">PART NAME</td> </tr> </table>				GENERAL TOLERANCE (UNLESS SPECIFIED)		UNIT: mm		$\leq 10 \pm 0.1$		名称		$< 10 \sim \leq 20 \pm 0.15$		PART NAME		$< 20 \sim \leq 50 \pm 0.3$		SCALE: 1: 1		Angle $\pm 1^\circ$		SIZE: A4				型号				PART NAME	
GENERAL TOLERANCE (UNLESS SPECIFIED)		UNIT: mm																													
$\leq 10 \pm 0.1$		名称																													
$< 10 \sim \leq 20 \pm 0.15$		PART NAME																													
$< 20 \sim \leq 50 \pm 0.3$		SCALE: 1: 1																													
Angle $\pm 1^\circ$		SIZE: A4																													
		型号																													
		PART NAME																													

	美易连电子科技(深圳)有限公司													
	Meiyilian electronic technology (shenzhen) Co., Ltd.													
	<table border="1"> <tr> <td>UNIT: mm</td> <td>名称</td> <td rowspan="2">DHG-3BP浮动插座 (不带护套式尾帽) DHG-3BP Floating socket (without jacketed tail cap)</td> </tr> <tr> <td>比例 SCALE: 1: 1</td> <td>PART NAME</td> </tr> <tr> <td>SIZE: A4</td> <td>型号</td> <td>DHG. 3BP. 318. KWLLD112</td> </tr> <tr> <td>REV/版本</td> <td>AI</td> <td>PART NAME</td> </tr> </table>	UNIT: mm	名称	DHG-3BP浮动插座 (不带护套式尾帽) DHG-3BP Floating socket (without jacketed tail cap)	比例 SCALE: 1: 1	PART NAME	SIZE: A4	型号	DHG. 3BP. 318. KWLLD112	REV/版本	AI	PART NAME	<table border="1"> <tr> <td>SHEET: 1 OF 1</td> </tr> </table>	SHEET: 1 OF 1
UNIT: mm	名称	DHG-3BP浮动插座 (不带护套式尾帽) DHG-3BP Floating socket (without jacketed tail cap)												
比例 SCALE: 1: 1	PART NAME													
SIZE: A4	型号	DHG. 3BP. 318. KWLLD112												
REV/版本	AI	PART NAME												
SHEET: 1 OF 1														