

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55°C~150°C

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 10.9\text{mm}-\phi 11.8\text{mm}$

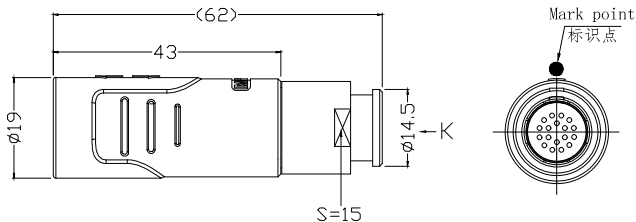

2. 电气性能

Insert Configuration/针芯配置: 3BP. 318 18Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 6\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1200V(AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质: 铜电镀

Insulator material/绝缘体材料: PPS

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘制

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28

	美易连电子科技(深圳)有限公司	
	Meiyilian electronic technology(shenzhen)Co.,Ltd.	

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^\circ \leq 20$	± 0.15
$< 20^\circ \leq 50$	± 0.3
Angle	$\pm 1^\circ$

	单位 UNIT: mm	名称 PART NAME	DHG-3BP浮动式插座(带护套尾座) DHG-3BP Floating socket (with jacketed tail cap)
	比例 SCALE: 1: 1	型号 PART NAME	
REV/版本	A1	图号 SHEET: 1 OF 1	DHG. 3BP. 318. KWLLD120Z

1

2

<https://www.myconnector.com/>

4

5

<https://www.myconnector.com/>

7

8