

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 7.1\text{mm}-\phi 8.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 3BP. 310 10Low Voltage

Pin Size/接触体直径: $\phi 1.3\text{mm}$

Contact resistance接触电阻: $\leq 5\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1250V(AC)

Rated working current额定工作电流: 12.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK



Other Shell Material/其它壳体材质 : 铜镀镍

Insulator material/绝缘体材料: PPS


IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图

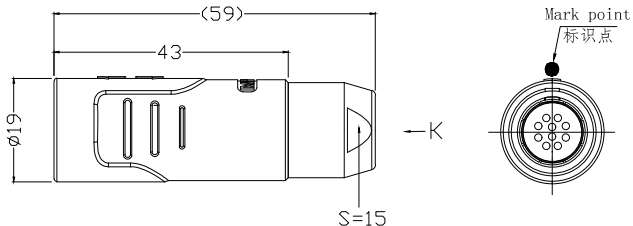

Socket front view
插座前视图



view K
K向孔位排列

DRAWN BY:
绘图: P003 2024. 05. 28
CHECKED BY:
审核: Z01 2024. 05. 28
APPROVED BY:
核准: P005 2024. 05. 28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$

$< 10 \sim \leq 20 \pm 0.15$

$< 20 \sim \leq 50 \pm 0.3$

Angle $\pm 1^\circ$



FIRST ANGLE PROJECTION

单位

DATE: mm

名称

PART NAME

比例

SCALE: 1: 1

型号

PART NAME

REV/版本

A1

SHEET: 1 OF 1

DHA-3BP浮动式插座(不带护套式尾帽)
DHA-3BP Floating socket
(without jacketed tail cap)

型号
DHA. 3BP. 310. KWLLD82