

# 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C  
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

## Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]  
 Shock Resistance/冲击: 100g[6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi$ 11.1mm- $\phi$ 12.0mm

## 2. 电气性能



Insert Configuration/针芯配置:4BP.330 30Low Voltage  
 Pin Size/接触件直径: $\phi$ 0.9mm  
 Contact resistance接触电阻: $\leq$ 9m $\Omega$   
 Insulation resistance/绝缘电阻:5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压:950V(AC)  
 Rated working current额定工作电流:5.0A

## Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

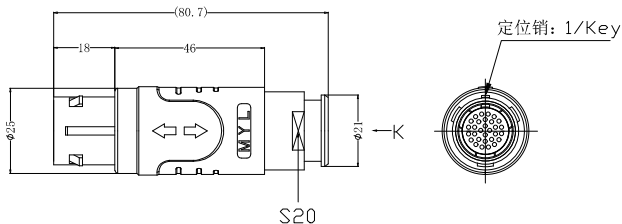

DRAWN BY:  
绘图: P003 2024.05.28  
 CHECKED BY:  
审核: Z01 2024.05.28  
 APPROVED BY:  
核准: P003 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)

$\leq$ 10  $\pm$ 0.1  
 $<$ 10 $\sim$  $\leq$ 20  $\pm$ 0.15  
 $<$ 20 $\sim$  $\leq$ 30  $\pm$ 0.3  
 Angle  $\pm$ 1'



FIRST ANGLE PROJECTION

单位  
(UNIT): mm  
 比例  
(SCALE): 1:1

名称  
(PART NAME)

尺寸  
(SIZE): A1

REV/版本  
(REV/VERSION): A1

型号  
(PART NAME)

SHEET: 1 OF 1

名称  
TG-4BP直式插头(带护套式尾帽)  
TG-4BP Straight Plug  
(with jacketed tail cap)

型号  
TGG.4BP.330.KWKAD122Z