

### 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $< 95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

### 2. 电气性能

Insert Configuration/针芯配置: 4BP. 320 20Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 1350V(AC)

Rated working current额定工作电流: 8.0A

### Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK




Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/绘图

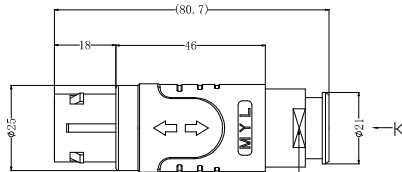

view K  
K向孔位排列

DRAWN BY: 绘图: PPO3	2024. 05. 28
CHECKED BY: 审核: Z01	2024. 05. 28
APPROVED BY: 核准: PPO3	2024. 05. 28



美易连电子科技(深圳)有限公司

Meiyilian electronic technology (shenzhen) Co. .Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$

$< 10 \sim \leq 20 \pm 0.15$

$< 20 \sim \leq 50 \pm 0.3$

Angle  $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位  
UNIT: mm

名称  
PART NAME

比例  
SCALE: 1: 1

型号  
PART NAME

REV/版本

A1

SHEET: 1 OF 1

TG-4BP直式插头 (带护套式尾帽)  
TG-4BP Straight Plug  
(with jacketed tail cap)

型号  
PART NAME  
TGG. 4BP. 320. KWLAD82Z