

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C}\sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<=95\%$  [at  $60\text{ deg C} / 140\text{ F}$ ]  
 Shielding /屏蔽性能:  $75\text{dB}(10\text{MHz})\ 40\text{dB}(1\text{GHz})$   
 Salt Spray Corrosion/盐雾:  $96\text{hr}$

### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz}\sim 2000\text{Hz}]$   
 Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$   
 Endurance (Shell)/机械寿命:  $5000+$   
 Cable/配接电缆:  $\phi 10.9\text{mm}-\phi 11.8\text{mm}$



## 2. 电气性能

Insert Configuration/针芯配置:  $3\text{BP}.307\ 7\text{Low Voltage}$   
 Pin Size/接触件直径:  $\phi 1.6\text{mm}$   
 Contact resistance接触电阻:  $\leq 4\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压 $500\text{V}(\text{DC})$ )  
 Withstand voltage/耐电压:  $1700\text{V}(\text{AC})$   
 Rated working current额定工作电流:  $15.0\text{A}$


### Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

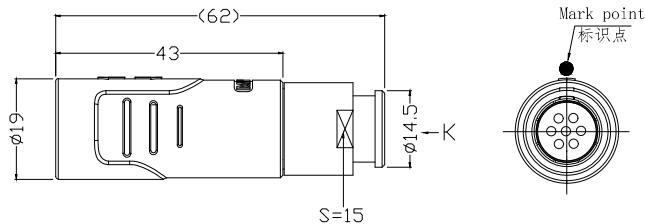

Socket front view  
插座前视图



view K  
K向孔位排列


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY:  
绘图: P003 2024.05.28  
 CHECKED BY:  
审核: Z01 2024.05.28  
 APPROVED BY:  
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 $\leq 10\ \pm 0.1$   
 $< 10^{\circ} \sim 20^{\circ}\ \pm 0.15$   
 $< 20^{\circ} \sim 50^{\circ}\ \pm 0.3$   
 Angle  $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位 UNIT: mm	名称 PART NAME	DHA-3BP浮动式插座(带护套式尾帽) DHA-3BP floating socket (with jacketed tail cap)
比例 SCALE: 1: 1		
SIZE: A4	型号 PART NAME	DHA. 3BP. 307. KWLLD120Z
REV/版本 A1	SHEET: 1 OF 1	