

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : ≤95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 14.1\text{mm}-\phi 15.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置:4BP.310 10Low Voltage

Pin Size/接触件直径: $\phi 1.6\text{mm}$

Contact resistance接触电阻: $\leq 4\text{m}\Omega$

Insulation resistance/绝缘电阻:5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压:1850V(AC)

Rated working current额定工作电流:17.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK



Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/绘图

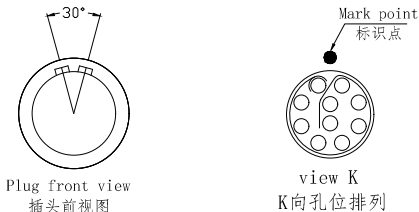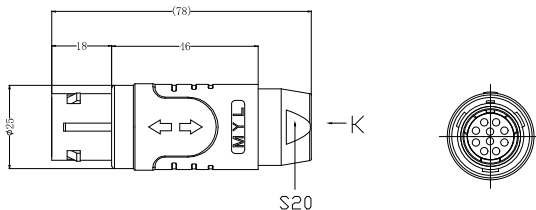

DRAWN BY:
绘图: P003
2024.05.28
CHECKED BY:
审核: Z01
2024.05.28
APPROVED BY:
核准: P005
2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^\circ \leq 20 \pm 0.15$ $< 20^\circ \leq 50 \pm 0.3$ Angle $\pm 1^\circ$	 FIRST ANGLE PROJECTION	单位 UNIT: mm	名称 PART NAME	TG-4BP直式插头(不带护套式尾帽) TG-4BP Straight Plug (without jacketed tail cap)
		比例 SCALE: 1:1	型号 PART NAME	
REV/版本	A1	SIZE: A4	型号 PART NAME	TGA. 4BP. 310. KWKAD152
SHEET: 1 OF 1				