

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 :  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿 :  $<=95\%$  [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

### Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 9.1\text{mm}-\phi 10.0\text{mm}$

## 2. 电气性能


Insert Configuration/针芯配置: 3BP.312 12Low Voltage  
 Pin Size/接触件直径:  $\phi 0.9\text{mm}$   
 Contact resistance接触电阻:  $\leq 6\text{m}\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 1450V(AC)  
 Rated working current额定工作电流: 9.0A

### Other Specification/其它规格:


Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PPS  
 IP Rating/防护等级 : IP50

**\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.**

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

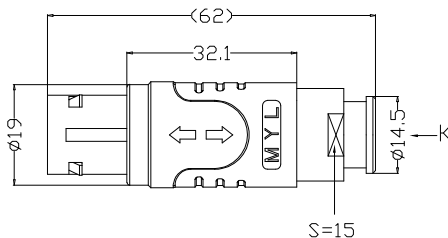


定位销: 1/KKey



DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28
GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10 \pm 0.1$	
$< 10^{\circ} \sim 20^{\circ} \pm 0.15$	
$< 20^{\circ} \sim 50^{\circ} \pm 0.3$	
Angle $\pm 1^{\circ}$	



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology (shenzhen) Co., Ltd.



单位 UNIT: mm	名称	TG-3BP直式插头(带护套式尾帽) TG-3BP Straight Plug (with jacketed tail cap)
比例 SCALE: 1: 1	PART NAME	
SIZE: A4	型号	TGG. 3BP. 312. KWLD102Z
SHEET: 1 OF 1	PART NAME	