

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<95\%$  [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$ [10Hz~2000Hz]  
 Shock Resistance/冲击:  $100\text{g}$ [6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi 9.1\text{mm} - \phi 10.0\text{mm}$

## 2. 电气性能




Insert Configuration/针芯配置: 3BP.305 5Low Voltage  
 Pin Size/接触件直径:  $\phi 1.6\text{mm}$   
 Contact resistance/接触电阻:  $\leq 4\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压:  $1900\text{V}$ (AC)  
 Rated working current/额定工作电流:  $19.0\text{A}$

### Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

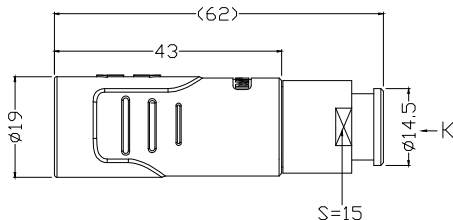

Socket front view  
插座前视图




view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28

GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10$	$\pm 0.1$
$< 10^{\circ} \sim 20$	$\pm 0.15$
$< 20^{\circ} \sim 50$	$\pm 0.3$
Angle	$\pm 1^{\circ}$



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.



FIRST ANGLE PROJECTION

REV/版本	A1
--------	----

单位 UNIT: mm	名称 PART NAME	DH4-3BP浮动式插座(带护套式尾帽) DH4-3BP Floating socket (with jacketed tail cap)
比例 SCALE: 1:1		
SIZE: A4	型号 PART NAME:	DH4. 3BP. 305. KWKLD102Z
SHEET: 1 OF 1		