


REV/版本	DESCRIPTION/型式名称	DATE/日期	DRAWN BY/制图

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃  
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]  
 Shock Resistance/冲击: 100g[6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi 7.1\text{mm}-\phi 8.0\text{mm}$

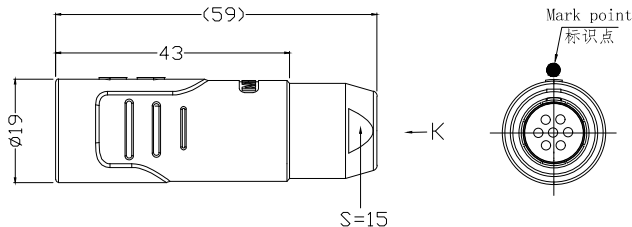


2. 电气性能

Insert Configuration/针芯配置: 3BP. 307 7Low Voltage  
 Pin Size/接触件直径:  $\phi 1.6\text{mm}$   
 Contact resistance接触电阻:  $\leq 4\text{m}\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V (DC))  
 Withstand voltage/耐电压: 1700V (AC)  
 Rated working current额定工作电流: 15.0A

Other Specification/其它规格:



Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

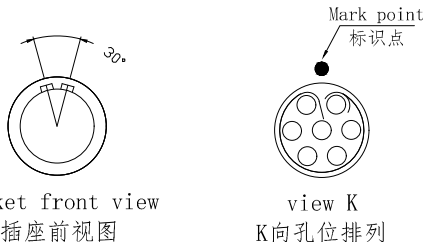

Socket front view  
插座前视图

view K  
K向孔位排列

DRAWN BY: 绘图: P003 2024.05.28	CHECKED BY: 审核: Z01 2024.05.28	APPROVED BY: 核准: P005 2024.05.28	 美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	单位	名称	DHA-3BP浮动式插座 (不带护套式尾帽) DHA-3BP Floating socket (without jacketed tail cup)
				UNIT: mm	PART NAME	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq 10 \pm 0.1$ $< 10^\circ \leq 20 \pm 0.15$ $< 20^\circ \leq 50 \pm 0.3$ Angle $\pm 1^\circ$				比例	型号	DHA. 3BP. 307. KWKLD82
				SCALE: 1:1	PART NAME	
FIRST ANGLE PROJECTION 				SIZE: A4	型号	DHA. 3BP. 307. KWKLD82
				SHEET: 1 OF 1	PART NAME	
REV/版本	A1	<a href="https://www.mylconnector.com/">https://www.mylconnector.com/</a>				