

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: $\phi 13.1\text{mm}-\phi 14.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 4BP.324 24Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: $5000\text{M}\Omega$ (测试电压500V(DC))

Withstand voltage/耐电压: 1200V(AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK



Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PPS


IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

| REV/版本 | DESCRIPTION/变更内容 | DATE/日期 | DRAWN BY/绘图 |
|--------|------------------|---------|-------------|
| | | | |

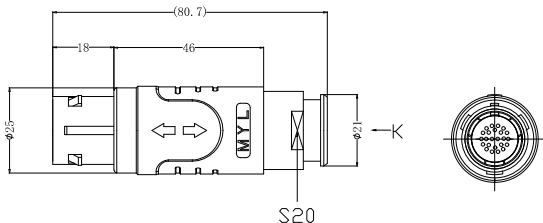

Plug front view
插头前视图




view K
K向孔位排列

| | |
|--------------------------|------------|
| DRAWN BY: 绘图: P003 | 2024.05.28 |
| CHECKED BY: 审核: Z01 | 2024.05.28 |
| APPROVED BY: 核准: P005 | 2024.05.28 |



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.

| | |
|---|---|
| GENERAL TOLERANCE (UNLESS SPECIFIED) | $\leq 10 \pm 0.1$ $< 10 \sim \leq 20 \pm 0.15$ $< 20 \sim \leq 50 \pm 0.3$ AngLe $\pm 1^\circ$ |
|---|---|



FIRST ANGLE PROJECTION

| | | |
|------------------|-----------|--|
| 单位 UNITS: mm | 名称 | TG-4BP直式插头(带护套式尾帽) |
| 比例 SCALE: 1:1 | PART NAME | TG-4BP Straight Plug (with jacketed tail cap) |
| 型号 | PART NAME | TGG. 4BP. 324. KWLAD142Z |

| | | |
|--------|----|---------------|
| REV/版本 | A1 | SHEET: 1 OF 1 |
|--------|----|---------------|