

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $<95\%$  [at  $60 \text{ deg C} / 140 \text{ F}$ ]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$ [10Hz~2000Hz]  
 Shock Resistance/冲击:  $100\text{g}$ [6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

## 2. 电气性能



Insert Configuration/针芯配置: 3BP. 307 7Low Voltage  
 Pin Size/接触件直径:  $\phi 1.6\text{mm}$   
 Contact resistance接触电阻:  $\leq 4\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压:  $1700\text{V(AC)}$   
 Rated working current额定工作电流:  $15.0\text{A}$

### Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/更改内容	DATE/日期	DRAWN BY/谁画

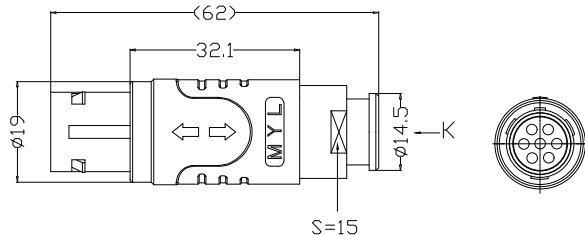

Plug front view  
插头前视图




view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024. 05. 28
CHECKED BY: 审核: Z01	2024. 05. 28
APPROVED BY: 核准: P005	2024. 05. 28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
$\leq 10$	$\pm 0.1$
$< 10^{\circ} \leq 20$	$\pm 0.15$
$< 20^{\circ} \leq 30$	$\pm 0.3$
Angle	$\pm 1^{\circ}$



单位 (UNIT): mm	名称 PART NAME
比例 SCALE: 1: 1	
SIZE: A1	型号 PART NAME
REV/版本 A1	

TG-3BP直式插头(带护套式尾帽) TG-3BP Straight Plug (with jacketed tail cap)
TGA. 3BP. 307. KWKAD82Z

1

2

<https://www.myconnector.com/>

4

5

<https://www.myconnector.com/>

7

8