

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃

Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]

Shock Resistance/冲击 : 100g[6ms]

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆: ϕ 4.1mm- ϕ 5.0mm

2. 电气性能

Insert Configuration/针芯配置:3BP.318 18Low Voltage

Pin Size/接触件直径: ϕ 0.9mm

Contact resistance接触电阻: \leq 6m Ω

Insulation resistance/绝缘电阻:5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压:1200V(AC)

Rated working current额定工作电流:7.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质 : PEEK



Other Shell Material/其它壳体材质 : 铜镀镍

Insulator material/绝缘体材料: PEEK

IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

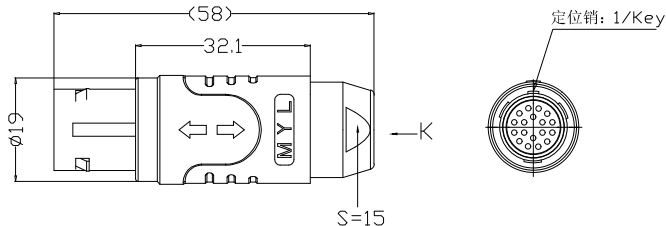


DRAWN BY:
绘图:PD03
2024.05.28
CHECKED BY:
审核:Z01
2024.05.28
APPROVED BY:
核准:FD05
2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)
 ≤ 10 ± 0.1
 $10 < \leq 30$ ± 0.15
 $30 < \leq 50$ ± 0.3
Angle $\pm 1^\circ$



FIRST ANGLE PROJECTION

单位
UNITS: mm
比例
SCALE: 1: 1

名称
PART NAME

TG-3BP直式插头(不带护套式尾帽)
TG-3BP Straight Plug
(without jacketed tail cap)

型号
PART NAME

TGG. 3BP. 318. KWKAD52

REV/版本 A1

SHEET: 1 OF 1