

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]
 Shock Resistance/冲击 : 100g[6ms]
 Endurance (Shell)/机械寿命 : 5000+
 Cable/配接电缆: ϕ 7.1mm- ϕ 8.0mm

2. 电气性能


Insert Configuration/针芯配置: 3BP. 309 9Low Voltage
 Pin Size/接触件直径: ϕ 2.0/1.3mm
 Contact resistance接触电阻: \leq 3.5m Ω , 5m Ω
 Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))
 Withstand voltage/耐电压: 1350V(AC)
 Rated working current额定工作电流: 15.0/6.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质 : PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

| REV/版本 | DESCRIPTION/变更内容 | DATE/日期 | DRAWN BY/绘图 |
|--------|------------------|---------|-------------|
| | | | |

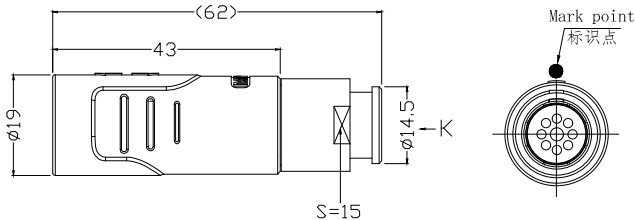

Socket front view
插座前视图


view K
K向孔位排列

DRAWN BY:
绘图: P003
2024.05.28
 CHECKED BY:
审核: Z01
2024.05.28
 APPROVED BY:
核准: P005
2024.05.28



美易连电子科技有限公司 (深圳) 有限公司
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)
 \leq 10 \pm 0.1
 $< 10^{\circ} \sim \leq 20^{\circ}$ \pm 0.15
 $< 20^{\circ} \sim \leq 50^{\circ}$ \pm 0.3
 Angle \pm 1°



FIRST ANGLE PROJECTION

| UNIT: mm | 名称 | DHA-3BP浮动式插座 (带护套式尾帽) DHA-3BP Floating socket (with jacketed tail cap) |
|-------------------|---------------|--|
| 比例 SCALE: 1: 1 | PART NAME | |
| SIZE: A4 | 型号 | DHA. 3BP. 309. KWKLD82Z |
| REV/版本 A1 | SHEET: 1 OF 1 | PART NAME |