

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

### Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 4.1\text{mm}-\phi 5.0\text{mm}$

## 2. 电气性能



Insert Configuration/针芯配置: 3BP.324 24Low Voltage  
 Pin Size/接触件直径:  $\phi 0.7\text{mm}$   
 Contact resistance接触电阻:  $\leq 4.5\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 950V(AC)  
 Rated working current额定工作电流: 4.0A

### Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质 : 铜镀镍  
 Insulator material/绝缘体材料 : PPS  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/描述内容	DATE/日期	DRAWN BY/绘图

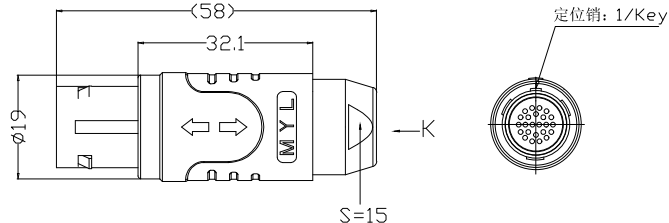


DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)

$\leq 10$   $\pm 0.1$   
 $< 10^\circ \sim 20^\circ$   $\pm 0.15$   
 $< 20^\circ \sim 50^\circ$   $\pm 0.3$   
 Angle  $\pm 1'$



FIRST ANGLE PROJECTION

单位 UNITS: mm	名称 PART NAME	TG-3BP直式插头(不带护套式尾帽) TG-3BP Straight Plug (without jacketed tail cap)
比例 SCALE: 1:1	型号 PART NAME	TGG. 3BP. 324. KWLAD52
尺寸 SIZE: A4	图号 PART NAME	TGG. 3BP. 324. KWLAD52
REV/版本 A1	图号 PART NAME	TGG. 3BP. 324. KWLAD52
图号 SHEET: 1 OF 1	图号 PART NAME	TGG. 3BP. 324. KWLAD52