

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾 : 96hr

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]
 Shock Resistance/冲击 : 100g[6ms]
 Endurance (Shell)/机械寿命 : 5000+
 Cable/配接电缆: ϕ 14.5mm- ϕ 15.4mm

2. 电气性能




Insert Configuration/针芯配置:4BP.340 40Low Voltage
 Pin Size/接触件直径: ϕ 0.7mm
 Contact resistance接触电阻: \leq 12.5m Ω
 Insulation resistance/绝缘电阻:5000M Ω (测试电压500V(DC))
 Withstand voltage/耐电压:900V(AC)
 Rated working current额定工作电流:2.0A

Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金
 Housing Material/外壳材质 : PEEK
 Other Shell Material/其它壳体材质: 铜镀镍
 Insulator material/绝缘体材料: PEEK
 IP Rating/防护等级 : IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

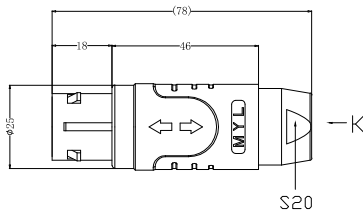

DRAWN BY: 绘图: PDB3		2024. 05. 28	
CHECKED BY: 审核: ZDI		2024. 05. 28	
APPROVED BY: 核准: PDB3		2024. 05. 28	
GENERAL TOLERANCE (UNLESS SPECIFIED)			
≤ 10 ± 0.1			
$< 10^\circ \leq 20$ ± 0.15			
$< 20^\circ \leq 50$ ± 0.3			
Angle $\pm 1^\circ$			

		美易连电子科技(深圳)有限公司	
		Meiyilian electronic technology(shenzhen)Co.,Ltd.	
 FIRST ANGLE PROJECTION	单位 UNIT: mm	名称	TG-4BP直式插头(不带护套式尾帽)
	比例 SCALE: 1: 1	PART NAME	TG-4BP Straight Plug (without jacketed tail cap)
REV/版本	A1	型号	TGG. 4BP. 340. KWKAD156
SHEET: 1 OF 1		PART NAME	