

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: Ø8.1mm-Ø9.0mm

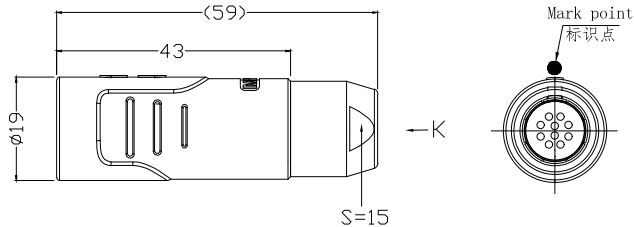

2. 电气性能

Insert Configuration/针芯配置: 3BP. 310 10Low Voltage


Pin Size/接触件直径: Ø1.3mm

Contact resistance接触电阻: ≤5mΩ

Insulation resistance/绝缘电阻: 5000MΩ (测试电压500V(DC))

Withstand voltage/耐电压: 1250V(AC)

Rated working current额定工作电流: 12.0A



view K  
K向孔位排列

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK


IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28

		美易连电子科技(深圳)有限公司	
		Meiyilian electronic technology(shenzhen) Co.,Ltd.	

GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10° ≤20 ±0.15 <20° ≤30 ±0.3 Angle ±1°	 FIRST ANGLE PROJECTION	单位 UNIT: mm	名称 PART NAME	DHG-3BP浮动式插座 (不带护套式尾帽) DHG-3BP Floating socket (without jacketed tail cap)
		比例 SCALE: 1:1	型号 PART NAME	DHG_3BP_310_KWKLD92
REV/版本	A1	张数 SHEET: 1 OF 1		