

# 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55℃~150℃  
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

## Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]  
 Shock Resistance/冲击: 100g[6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi$ 10.1mm- $\phi$ 11.0mm

## 2. 电气性能



Insert Configuration/针芯配置: 4BP. 320 20Low Voltage  
 Pin Size/接触件直径:  $\phi$ 0.9mm  
 Contact resistance接触电阻:  $\leq$ 9m $\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V (DC))  
 Withstand voltage/耐电压: 1350V (AC)  
 Rated working current额定工作电流: 8.0A

## Other Specification/其它规格:


Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

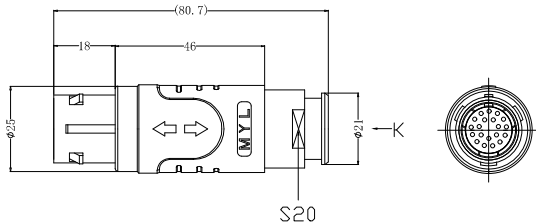

Plug front view  
插头前视图



view K  
K向孔位排列

DRAWN BY: 绘图: P003	2024.05.28	
CHECKED BY: 审核: Z01	2024.05.28	
APPROVED BY: 核准: P005	2024.05.28	
GENERAL TOLERANCE (UNLESS SPECIFIED) $\leq$ 10 $\pm$ 0.1 $<$ 10 $\sim$ $\leq$ 20 $\pm$ 0.15 $<$ 20 $\sim$ $\leq$ 50 $\pm$ 0.3 Angle $\pm$ 1°		FIRST ANGLE PROJECTION 

美易连电子科技(深圳)有限公司 Meiyilian electronic technology (shenzhen) Co., Ltd.	
单位 UNIT: mm 比例 SCALE: 1:1 名称 PART NAME	TG-4BP直式插头(带护套式尾帽) TG-4BP Straight Plug (with jacketed tail cap)
型号 PART NAME	TGG. 4BP. 320. KWKAD112Z
REV/版本 A1	SHEET: 1 OF 1