



REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图


1. Product main performance/产品主要性能指标:
 Operating Temperature/工作温度 : -55°C~200°C
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)
 Salt Spray Corrosion/盐雾 : 96hr
 P op (max)/最大环境压力 : 60 bar (870 psi)

Mechanical data/机械特性:
 Vibration/振动 : 15g[10Hz~2000Hz]
 Shock Resistance/冲击 : 100g[6ms]
 Endurance (Shell)/机械寿命 : 5000+

2. 电气性能
 Insert Configuration/针芯配置:0F.309 9Low Voltage
 Pin Size/接触件直径:Ø0.5mm
 Contact resistance接触电阻:≤15mΩ
 Insulation resistance/绝缘电阻:5000MΩ (测试电压500V(DC))
 Withstand voltage/耐电压:500V(AC)
 Rated working current额定工作电流:2.0A

Other Specification/其它规格:
 Contact PIN/接触体 :Gold-Tin bronze plating/锡青铜镀金
 Housing Material/外壳材质 :Pearl-plated chrome brass/黄铜镀珍珠铬
 Other metal spare parts/其余金属件 : nickel plated brass/黄铜镀镍
 Insulator material/绝缘材料: PEEK
 IP Rating/防护等级 :IP68(插合状态)
 *ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

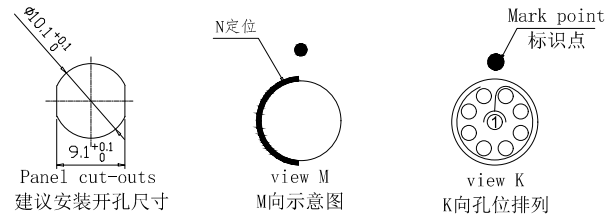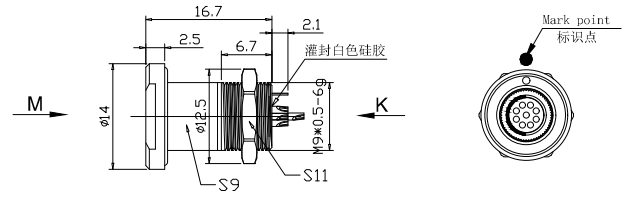

DRAWN BY: 绘图:PDO3 2024.05.28		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co.,Ltd.	名称 PART NAME		ZEN-0F固定式插座 ZEN-0F Fixed socket	
CHECKED BY: 审核:Z01 2024.05.28			比例 SCALE: 1: 1		型号 PART NAME	ZEN. 0F. 309. CLL
APPROVED BY: 核准:PDO3 2024.05.28			单位 UNTT: mm	名称 PART NAME		ZEN-0F固定式插座 ZEN-0F Fixed socket
GENERAL TOLERANCE (UNLESS SPECIFIED)		FIRST ANGLE PROJECTION		型号 PART NAME	ZEN. 0F. 309. CLL	
≤10 ±0.1		REV/版本		A1	SHEET: 1 OF 1	
<10~≤20 ±0.15		REV/版本		A1	SHEET: 1 OF 1	
<20~≤50 ±0.3		REV/版本		A1	SHEET: 1 OF 1	
AngIe ±1°		REV/版本		A1	SHEET: 1 OF 1	