


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~200℃  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr  
 P op (max)/最大环境压力 : 60 bar (870 psi)


Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+

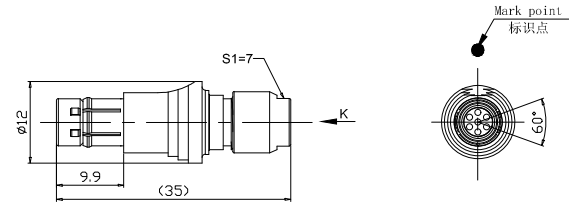

2. 电气性能

Insert Configuration/针芯配置:0U.307 7Low Voltage  
 Pin Size/接触件直径:<math>\phi 0.5\text{mm}</math>  
 Contact resistance接触电阻:<math>\leq 15\text{m}\Omega</math>  
 Insulation resistance/绝缘电阻:5000M<math>\Omega</math>(测试电压500V(DC))  
 Withstand voltage/耐电压:500V(AC)  
 Rated working current额定工作电流:2.5A  
 Cable/配接电缆:<math>\phi 4.1\text{mm}-\phi 5.0\text{mm}</math>



Other Specification/其它规格:

Contact PIN/接触体 :Gold-Tin bronze plating/锡青铜镀金  
 Housing Material/外壳材质 :Pearl-plated chrome brass/黄铜镀珍珠铬  
 Other metal spare parts/其余金属件 : nickel plated brass/黄铜镀镍  
 Insulator material/绝缘材料: PPS  
 IP Rating/防护等级 :IP68(插合状态)


\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

DRAWN BY:  
绘图:PD03 2024.05.28  
 CHECKED BY:  
审核:Z01 2024.05.28  
 APPROVED BY:  
核准:PD05 2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)  
 <math>\leq 10 \pm 0.1</math>  
 <math>< 10 \sim \leq 20 \pm 0.15</math>  
 <math>< 20 \sim \leq 50 \pm 0.3</math>  
 Angle <math>\pm 1^\circ</math>



FIRST ANGLE PROJECTION  
 REV/版本 A1 SHEET: 1 OF 1

单位  
UNIT: mm  
 比例  
SCALE: 1: 1  
 型号  
PART NAME

名称  
PART NAME

TGB-0U直式插头(不带护套式尾帽)  
 TGB-0U Straight Plug  
 (without jacketed tail cap)  
 型号  
PART NAME  
 TGB. 0U. 307. CLAD52