

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿: $<=95\%$ [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: $\phi 7.1\text{mm} - \phi 8.0\text{mm}$

2. 电气性能

Insert Configuration/针芯配置: 4BP. 324 24Low Voltage

Pin Size/接触件直径: $\phi 0.9\text{mm}$

Contact resistance接触电阻: $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻: 5000M Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1200V(AC)

Rated working current额定工作电流: 7.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金

Housing Material/外壳材质: PEEK




Other Shell Material/其它壳体材质: 铜镀镍

Insulator material/绝缘体材料: PEEK


IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/制图

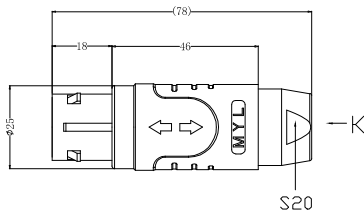

Plug front view
插头前视图




view K
K向孔位排列

DRAWN BY: 绘图: P103	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P103	2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	
≤ 10	± 0.1
$< 10^{\circ} \leq 20$	± 0.15
$< 20^{\circ} \leq 50$	± 0.3
Angle	$\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位 UNIT:	mm
比例 SCALE:	1:1
尺寸 SIZE:	A1

名称 PART NAME	型号 TYPE
-----------------	------------

TG-4BP直式插头(不带护套式尾帽)
TG-4BP Straight Plug
(without jacketed tail cap)

REV/版本	A1
--------	----

SHEET: 1 OF 1

型号 PART NAME	TGG. 4BP. 324. KWKAD82
-----------------	------------------------

1

2

<https://www.myconnector.com/>

4

5

<https://www.myconnector.com/>

7

8