


# I. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~150℃  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr

## Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000+  
 Cable/配接电缆:  $\phi 5.1\text{mm}-\phi 6.0\text{mm}$

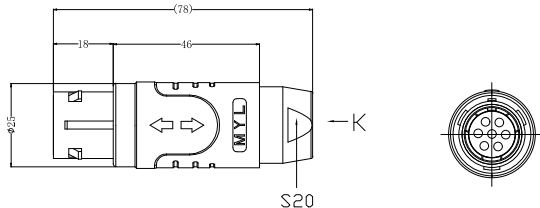


## 2. 电气性能

Insert Configuration/针芯配置:4BP.307 7Low Voltage  
 Pin Size/接触件直径: $\phi 2.0\text{mm}$   
 Contact resistance接触电阻: $\leq 3.5\text{m}\Omega$   
 Insulation resistance/绝缘电阻:5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压:2000V(AC)  
 Rated working current额定工作电流:20.0A


## Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质 : PEEK  
 Other Shell Material/其它壳体材质 : 铜镀镍  
 Insulator material/绝缘体材料 : PEEK  
 IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图



view K  
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图:PD03 2024.05.28 CHECKED BY: 审核:Z01 2024.05.28 APPROVED BY: 核准:PD05 2024.05.28		单位: mm 比例: 1:1 名称: TGA.4BP.307.KWKAD62 PART NAME 型号: TGA.4BP.307.KWKAD62 PART NAME
GENERAL TOLERANCE (UNLESS SPECIFIED) ≤10 ±0.1 <10° ≤20 ±0.15 <20° ≤50 ±0.3 Angle ±1°		
FIRST ANGLE PROJECTION		REV/版本: A1 SHEET: 1 OF 1

美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology(shenzhen)Co.,Ltd.

	名称: TGA.4BP.307.KWKAD62 PART NAME 型号: TGA.4BP.307.KWKAD62 PART NAME
REV/版本: A1 SHEET: 1 OF 1	TGA-4BP直式插头(不带护套式尾帽) TG-4BP Straight Plug (without jacketed tail cap)