

1) Product main performance/产品主要性能指标:

Operating Temperature/工作温度 : -55℃~200℃  
 Humidity(max)/最大潮湿 : <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾 : 96hr  
 P op (max)/最大环境压力 : 60 bar (870 psi)

Mechanical data/机械特性:

Vibration/振动 : 15g[10Hz~2000Hz]  
 Shock Resistance/冲击 : 100g[6ms]  
 Endurance (Shell)/机械寿命 : 5000次




2. 电气性能

Insert Configuration/针芯配置: 1T.304 4Low Voltage  
 Pin Size/接触件直径:  $\phi 0.9$ mm  
 Contact resistance接触电阻:  $\leq 9$ m $\Omega$   
 Insulation resistance/绝缘电阻: 5000M $\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 875V(AC)  
 Rated working current额定工作电流: 10.0A


Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: Chrome plated brass/铜镀珍珠铬  
 Other metal spare parts/其余金属件: Nickel plated brass/铜镀镍  
 Glue filling type/灌胶类型: White silica gel/白色硅胶  
 Insulator material/绝缘材料: PPS  
 IP Rating/防护等级: IP68(插入状态)



\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

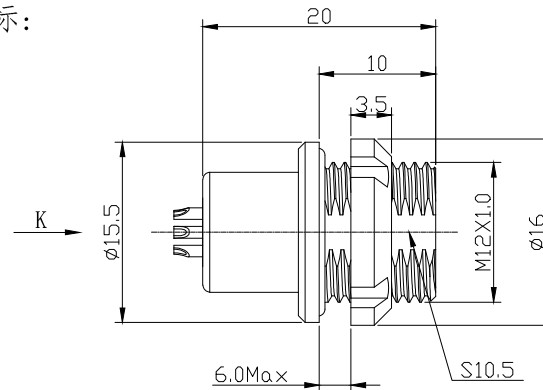

Panel cut-outs  
建议安装开孔尺寸



view K  
K向孔位排列

|  |   |  |   |
|--|---|--|---|
| DRAWN BY:<br>绘图: Z01<br>2024. 6. 20<br>CHECKED BY:<br>审核: Z01<br>2024. 6. 20<br>APPROVED BY:<br>核准: PD05<br>2024. 6. 20                            |   |  美易连电子科技(深圳)有限公司<br>Meiyilian electronic technology(shenzhen)Co. Ltd. |   |
| GENERAL TOLERANCE<br>(UNLESS SPECIFIED)<br>$\leq 10 \pm 0.1$<br>$< 10 \sim \leq 20 \pm 0.15$<br>$< 20 \sim \leq 50 \pm 0.3$<br>Angle $\pm 1^\circ$ | <br>FIRST ANGLE PROJECTION | 单位<br>UNIT: mm   | 名称<br>PART NAME<br>1T-ME固定式插座<br>1T-ME Fixed socket |
|  |   | 比例<br>SCALE: 1: 1  | 型号<br>PART NAME<br>MEG. 1T. 304. CLL                |
| REV/版本<br>A1   | SHEET: 1 OF 1   |  |   |