

1) Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C}\sim 200^{\circ}\text{C}$   
 Humidity(max)/最大潮湿:  $\leq 95\%$  [at  $60^{\circ}\text{C}$  /  $140^{\circ}\text{F}$ ]  
 Shielding /屏蔽性能:  $75\text{dB}(10\text{MHz})$   $40\text{dB}(1\text{GHz})$   
 Salt Spray Corrosion/盐雾: 96hr  
 P op (max)/最大环境压力: 60 bar (870 psi)

Mechanical data/机械特性:

Vibration/振动:  $15\text{g}[10\text{Hz}\sim 2000\text{Hz}]$   
 Shock Resistance/冲击:  $100\text{g}[6\text{ms}]$   
 Endurance (Shell)/机械寿命: 5000次  
 Cable/配接电缆:  $\phi 6.1\text{mm}-\phi 7.0\text{mm}$



2. 电气性能


Insert Configuration/针芯配置: 2T.332 32Low Voltage  
 Pin Size/接触件直径:  $\phi 0.5\text{mm}$   
 Contact resistance接触电阻:  $\leq 15\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压 $500\text{V}(\text{DC})$ )  
 Withstand voltage/耐电压:  $750\text{V}(\text{AC})$   
 Rated working current额定工作电流:  $1.5\text{A}$

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: Chrome plated brass/铜镀珍珠铬  
 Other metal spare parts/其余金属件: Nickel plated brass/铜镀镍  
 Insulator material/绝缘材料: PPS  
 IP Rating/防护等级: IP68(插入状态)

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.

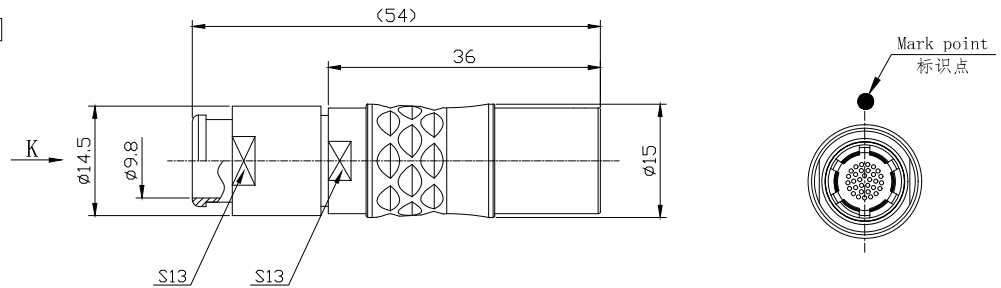

DRAWN BY: 绘图: Z01 2024.6.20		 美易连电子科技(深圳)有限公司 Meiyilian electronic technology(shenzhen)Co. Ltd.		名称 PART NAME		2T-DH浮动式插座 2T-DH Floating socket			
CHECKED BY: 审核: Z01 2024.6.20				单位 UNIT: mm		比例 SCALE: 1: 1		型号 PART NAME	
APPROVED BY: 核准: PD05 2024.6.20				FIRST ANGLE PROJECTION		SIZE: A4		DHG. 2T. 332. CLAC72Z	
GENERAL TOLERANCE (UNLESS SPECIFIED)		REV/版本		SHEET: 1 OF 1					
$\leq 10$ $\pm 0.1$		A1							
$< 10^{\circ} \leq 20$ $\pm 0.15$									
$< 20^{\circ} \leq 50$ $\pm 0.3$									
Angle $\pm 1^{\circ}$									