

1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C

Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]

Shock Resistance/冲击: 100g[6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆: Ø8.1mm-Ø9.0mm

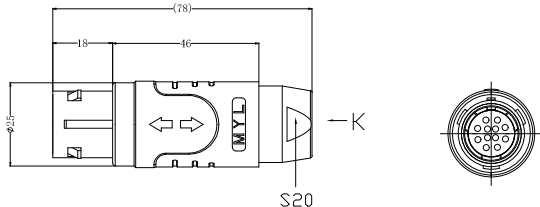

2. 电气性能

Insert Configuration/针芯配置: 4BP.312 12Low Voltage

Pin Size/接触件直径: Ø1.3mm

Contact resistance接触电阻: ≤4mΩ

Insulation resistance/绝缘电阻: 5000Ω (测试电压500V(DC))

Withstand voltage/耐电压: 1450V(AC)

Rated working current额定工作电流: 12.0A

Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PEEK

IP Rating/防护等级: IP50

*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view
插头前视图



view K
K向孔位排列


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY:
绘图: P003 2024.05.28
CHECKED BY:
审核: Z01 2024.05.28
APPROVED BY:
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司
Meiyilian electronic technology(shenzhen)Co.,Ltd.

GENERAL TOLERANCE
(UNLESS SPECIFIED)
≤10 ±0.1
<10° ≤20 ±0.15
<20° ≤50 ±0.3
Angle ±1°



单位 UNIT: mm	名称 PART NAME	TG-4BP直式插头(不带护套式尾帽) TG-4BP Straight Plug (without jacketed tail cap)
比例 SCALE: 1:1	型号 PART NAME	TGA.4BP.312.KWKAD92
尺寸 SIZE: A4	REV/版本	A1
SHEET: 1 OF 1		