

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度:  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿:  $\leq 95\%$  [at 60 deg C / 140 F]

Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾: 96hr


### Mechanical data/机械特性:

Vibration/振动:  $15\text{g}$  [10Hz~2000Hz]

Shock Resistance/冲击:  $100\text{g}$  [6ms]

Endurance (Shell)/机械寿命: 5000+

Cable/配接电缆:  $\phi 6.1\text{mm} - \phi 7.0\text{mm}$

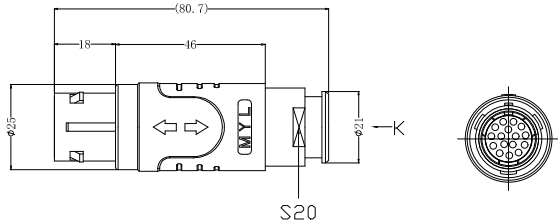

## 2. 电气性能

Insert Configuration/针芯配置: 4BP. 316 16Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 4\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压:  $1350\text{V}$ (AC)

Rated working current额定工作电流:  $10.0\text{A}$

### Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质: PEEK

Other Shell Material/其它壳体材质: 铜镀镍


Insulator material/绝缘体材料: PPS

IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图



view K  
K向孔位排列

DRAWN BY:  
绘图: P003 2024. 05. 28  
CHECKED BY:  
审核: Z01 2024. 05. 28  
APPROVED BY:  
核准: P003 2024. 05. 28




美易连电子科技(深圳)有限公司

Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$   
 $< 10^{\circ} \sim \leq 20 \pm 0.15$   
 $< 20^{\circ} \sim \leq 50 \pm 0.3$   
Angle  $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位

UNIT: mm

比例

SCALE: 1:1

型号

SIZE: A4

REV/版本

Sheet: 1 OF 1

名称

PART NAME

型号

PART NAME

TG-4BP直式插头(带护套式尾帽)  
TG-4BP Straight Plug  
(with jacketed tail cap)

TGG. 4BP. 316. KWLAD7Z2