


1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度: -55°C~150°C  
 Humidity(max)/最大潮湿: <=95% [at 60 deg C / 140 F]  
 Shielding /屏蔽性能: 75dB(10MHz) 40dB(1GHz)  
 Salt Spray Corrosion/盐雾: 96hr

Mechanical data/机械特性:

Vibration/振动: 15g[10Hz~2000Hz]  
 Shock Resistance/冲击: 100g[6ms]  
 Endurance (Shell)/机械寿命: 5000+  
 Cable/配接电缆:  $\phi 14.1\text{mm}-\phi 15.0\text{mm}$

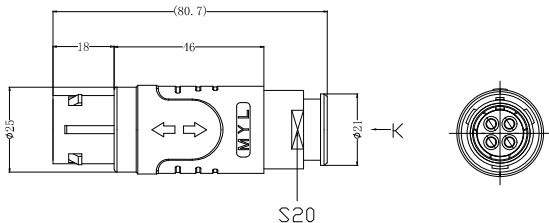


2. 电气性能

Insert Configuration/针芯配置: 4BP. 304 4Low Voltage  
 Pin Size/接触件直径:  $\phi 3.0\text{mm}$   
 Contact resistance接触电阻:  $\leq 3\text{m}\Omega$   
 Insulation resistance/绝缘电阻:  $5000\text{M}\Omega$  (测试电压500V(DC))  
 Withstand voltage/耐电压: 2100V(AC)  
 Rated working current额定工作电流: 30.0A


Other Specification/其它规格:

Contact PIN/接触体: Gold plated Tin bronze/锡青铜镀金  
 Housing Material/外壳材质: PEEK  
 Other Shell Material/其它壳体材质: 铜镀镍  
 Insulator material/绝缘体材料: PEEK  
 IP Rating/防护等级: IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图



view K  
K向孔位排列


REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图

DRAWN BY: 绘图: P003	2024.05.28
CHECKED BY: 审核: Z01	2024.05.28
APPROVED BY: 核准: P005	2024.05.28



美易连电子科技(深圳)有限公司  
 Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE (UNLESS SPECIFIED)	$\leq 10$ $\pm 0.1$ $< 10^\circ \leq 20$ $\pm 0.15$ $< 20^\circ \leq 50$ $\pm 0.3$ Angle $\pm 1^\circ$
---	---



REV/版本	A1	SHEET: 1 OF 1
--------	----	---------------

单位 UNIT: mm	名称 PART NAME
比例 SCALE: 1: 1	型号 PART NAME
名称 PART NAME	型号 PART NAME

名称 PART NAME	TG-4BP直式插头(带护套式尾帽) TG-4BP Straight Plug (with jacketed tail cap)
型号 PART NAME	TGA. 4BP. 304. KWKAD152Z