

## 1. Product main performance/产品主要性能指标:

Operating Temperature/工作温度 :  $-55^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Humidity(max)/最大潮湿 :  $\leq 95\%$  [at  $60^{\circ}\text{C} / 140^{\circ}\text{F}$ ]

Shielding /屏蔽性能 : 75dB(10MHz) 40dB(1GHz)

Salt Spray Corrosion/盐雾 : 96hr



### Mechanical data/机械特性:

Vibration/振动 :  $15\text{g}[10\text{Hz} \sim 2000\text{Hz}]$

Shock Resistance/冲击 :  $100\text{g}[6\text{ms}]$

Endurance (Shell)/机械寿命 : 5000+

Cable/配接电缆:  $\phi 14.1\text{mm} - \phi 15.0\text{mm}$

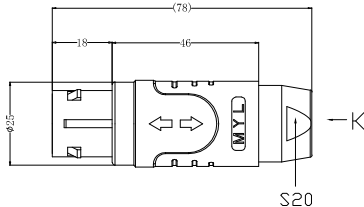

## 2. 电气性能

Insert Configuration/针芯配置: 4BP. 320 20Low Voltage

Pin Size/接触件直径:  $\phi 0.9\text{mm}$

Contact resistance接触电阻:  $\leq 9\text{m}\Omega$

Insulation resistance/绝缘电阻:  $5000\Omega$  (测试电压500V(DC))

Withstand voltage/耐电压: 1350V(AC)

Rated working current额定工作电流: 8.0A

### Other Specification/其它规格:

Contact PIN/接触体 : Gold plated Tin bronze/锡青铜镀金


Housing Material/外壳材质 : PEEK

Other Shell Material/其它壳体材质 : 铜镀镍


Insulator material/绝缘体材料 : PEEK

IP Rating/防护等级 : IP50

\*ALL MATERIALS ARE RoHS COMPLIANT/所有材料均符合RoHS要求.



Plug front view  
插头前视图



view K  
K向孔位排列

REV/版本	DESCRIPTION/变更内容	DATE/日期	DRAWN BY/绘图


DRAWN BY:  
绘图: P003 2024.05.28  
CHECKED BY:  
审核: Z01 2024.05.28  
APPROVED BY:  
核准: P005 2024.05.28



美易连电子科技(深圳)有限公司  
Meiyilian electronic technology (shenzhen) Co., Ltd.

GENERAL TOLERANCE  
(UNLESS SPECIFIED)

$\leq 10 \pm 0.1$   
 $< 10^{\circ} \sim \leq 20^{\circ} \pm 0.15$   
 $< 20^{\circ} \sim \leq 50^{\circ} \pm 0.3$   
Angle  $\pm 1^{\circ}$



FIRST ANGLE PROJECTION

单位  
UNIT: mm

比例  
SCALE: 1:1

名称  
PART NAME

型号  
PART NAME

REV/版本

A1

SHEET: 1 OF 1

TG-4BP直式插头(不带护套式尾帽)  
TG-4BP Straight Plug  
(without jacketed tail cap)

TGG. 4BP. 320. KWKAD152